


Die-Cut Lidding

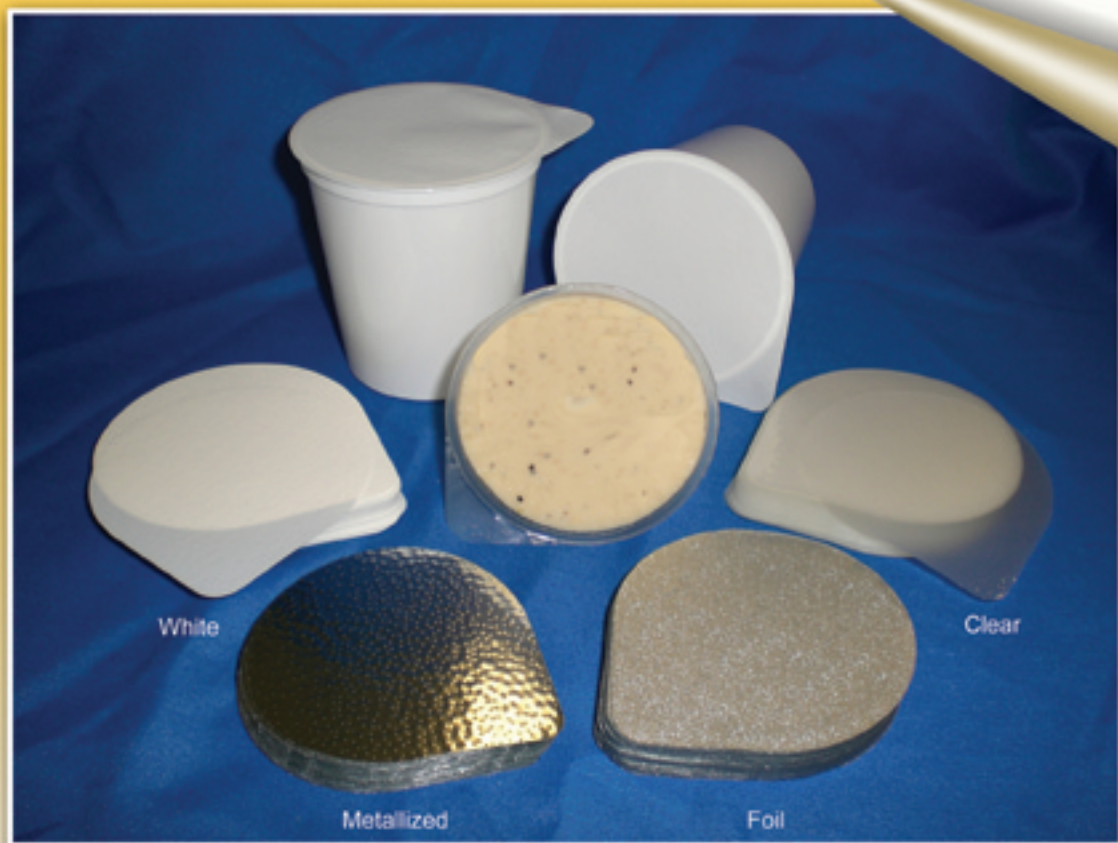

Advantages of APC's All Plastic Lidding compared to Foil Lidding:

- ✓ Lower cost
- ✓ Source Reduction: > 20% reduction in weight
- ✓ A > 50% reduction in the energy required to manufacture components
- ✓ 10 fold improvement in puncture resistance
- ✓ Capable of reverse/trap print
- ✓ Improved shelf appeal: higher gloss and reduced shop worn appearance
- ✓ Increased tear and tensile properties
- ✓ Options: translucent, white and metallized
- ✓ Non metallic options for metal detection

Other Features:

- ✓ Very wide heat sealing range: > 100°F
- ✓ Excellent seal/peel characteristics (> 2 lbs/inch) to: PP, HIPS, PETE, PETG, and CPET
- ✓ Withstands 12" of vacuum > 2 minutes
- ✓ Suitable for hot fill applications up to 190°F
- ✓ Approved for use under conditions C through H of 21CFR 175.300
- ✓ Complies with extractable requirements for refrigerated fatty foods

Barrier properties of Metallized Lidding after embossing:

- ✓ MVTR: ≤ 0.02 gm/100 in²/24hrs@100°F, 90% RH
- ✓ OTR: ≤ 0.03 cc/100 in²/24hrs@73°F, 0% RH

Rotogravure * Flexographic * Extrusion Laminating * Preformed Products

For over 100 years, APC has partnered with its customers to design, develop and implement innovative solutions for their packaging needs.

To see our full-service capabilities, visit us online at www.ampkcorp.com
777 Driving Park Avenue * Rochester, NY 14613 * (585) 254-9500


**AMERICAN
PACKAGING
CORPORATION**